

 <p>भा.कृ.अनु.प. ICAR</p>	<p>भा.कृ.अनु.प. - खरपतवार अनुसंधान निदेशालय ICAR - Directorate of Weed Research महाराजपुर, अधारताल, जबलपुर – 482004, (म. प्र.), भारत Maharajpur, Adhartal, Jabalpur 482 004 (M.P.), INDIA</p>	 <p>खरपतवार अनुसंधान निदेशालय, जबलपुर-४ (म.प्र.) D W R</p>
<p>EPABX : +91-761-2353101, 2353934</p> <p>Fax : 0761 – 2353129</p>	<p>Gram : WEEDSCIENCE</p> <p>Email : dirdwsr@icar.org.in</p>	
<p>F.No. : 13-61/Works/2016-17</p>	<p>Dt. : 03-10-2016</p>	

To,

Sub.-: **Quotation for the Extension of Temporary Shed at Pond side– reg.**

Dear Sir(s)

On behalf of the Director of this Directorate, Quotations are invited for the extension of Temporary Shed at Pond side as mentioned below:-

Sealed quotations are invited for the necessary work as per details given below.

Sl.	Particulars of work	Quantum of work approx.
1	Vertical post 3"Ø round/sq. ms pipe of best quality ISI mark with primer and paint complete in all respect.	8 nos. x 15' = 120 rft.
2	Center vertical post 3"Ø round/sq. ms pipe of best quality ISI mark with primer and paint complete in all respect.	3 nos. x 15' = 75 rft.
3	Horizontal rafter 3" square ms pipe of best quality ISI mark with primer and paint complete in all respect.	4 nos. x 24' = 96 rft.
4	Center Horizontal rafter 3" square ms pipe of best quality ISI mark with primer and paint complete in all	4 nos. x 24' = 96 rft.

	respect.	
5	Pralines 2" square ms pipe of best quality ISI mark with primer and paint complete in all respect.	5 nos. x 34' = 170 rft.
6	RCC Pile with Excavation in Floor for vertical post (DUR Bulb) 1:2:4 mix C:S:A including tested steel, fixed in position complete including cutting bending, all handling and binding wire and placing in position etc. 10 ϕ , 6 ϕ mm with binding wire.	8 nos. x 1.5' x ϕ 9" = 6.6 cuft above the floor level
		8 nos. x 10' x ϕ 9" = 43.5 cuft below the floor level
7	Digging of above said area 6" filling and laying of 6" hard murum with complete compaction in all respect.	34' x 24' x 6" = 408 cuft. approx
8	RCC Heavy duty floor with 6" thickness (1:2:4) mix. C:S:A including proper slope should be given on both the side to match existing floor/level as per CPWD specification with fine finishing on top surface by	34' x 24' x 6" = 408 cuft. approx
9	Providing and fixing Profile sheet 1.6mm of standard company make ISI mark with screw, bitumen washer and all required items complete fitting in all respect. (If available at directorate may be used but rate should be essesintaly quoted on sqft. Basis)	34' x 24' = 816 suft. approx
10	Construction of RCC Beam 9" x 6" with 1:2:4 mix C:S:A including tested steel, fixed in position complete including cutting bending, all handling and binding wire and placing in position etc. 10 ϕ , 6 ϕ mm rod with binding wire complete	82 x 9" x 6" = 30.75 cuft
11	MS plates for joining the vertical post and foundation plate and for rafter etc.	24 nos x 8" x 3" or as per requirement.
12	Fixing, welding of rafter and pralines with respect to vertical posts, and overlapping of sheet with existing shed roof and other work which arise during the work complete in all respect.	As per requirement.
13	MS plates for joining the horizontal post and vertical	36 nos. x 6" x 3" as

	post and pralines, rafter etc.	per requirement
14	Any other small or petty work arise during the work which is not included in above estimate is also required to be done by contractor, no extra payment will be given for such work.	


नोट:- 1. ठेकेदार कोटेशन देने के पूर्व स्थल निरीक्षण अवश्य कर ले। 2. उपयोग में आने वाला मटेरियल उच्च (**quality**) गुणवत्ता का व स्टेण्डर्ड कम्पनी का होना चाहिए तथा मटेरियल लगाने के पूर्व सेम्पल को निर्माण समिति से अनुमोदित करा कर कार्य में लगाया जाना अनिवार्य होगा। 3. ठेकेदार कार्य आदेश में दी गई कार्य की मात्रा के अनुसार कार्य करें मात्रा लिखित मात्रा से अधिक होने की संभावना होने पर पूर्व में सक्षम अधिकारी से लिखित अनुमति प्राप्त कर ही आगे का कार्य करें, 4 ठेकेदार कार्य प्रारम्भ करने के पूर्व सम्बन्धित अनुभाग की अनुमति प्राप्त कर कार्य प्रारम्भ करें। 5 सिविल कार्य अन्यकार्यों के रेट रनिंगफुट/वर्गफुट आधार पर ही कोट करें। प्रांकलन के साथ संलग्न ड्राईंग भी संलग्न करें।

Terms and conditions

- 1 The rates should be quoted F.O.R. Destination Directorate DWR, Campus at Maharajpur, Jabalpur.
2. Rates of Sales Tax, Service Tax and other taxes liable should be indicated in clear terms separately. Sales Tax Registration Number both under state and Central Tax Act/Rules should be specifically indicated.
- 3 Tax Deduction at Source (TDS), If applicable, will be made from the Bill of your Firm/Agency.
- 4 Unless otherwise mentioned in the quotation, it will be presumed that the quoted rates are inclusive of all taxes/levies.
- 5 The work should be done in accordance with CPWD specifications.
- 6 The rates quoted should be valid for 90 days from the date of opening of quotation and it should include all charges.
- 7 There should be no cutting/overwriting. The cuttings if any should be duly attested. Unattested/ amended/ overwritten figures will not be considered.
- 8 In all matters of disputes, the decision of the Director of this Directorate shall be final.
- 9 Payment will be made within reasonable time say within 30 days after the completion & verification of bill at this Directorate. Since the mode of payment will be e-payment system, hence Bank Account Number, Address and IFSC Code Number of Bank must be mentioned in the bill/invoice.
- 10 Quotation should be sent in a sealed cover (BY REGD. POST/SPEED POST/COURIER/UPC/TENDER BOX DWR Jabalpur) and the covering containing.

Quotation for extension of Temporary Shed at Pond side **24/10/2016 on or before 3.00 pm** Quotations received in an unsealed cover or received after the due date and those which are ambiguous are liable to be rejected. Quotations will be opened on the same day at **3.30 P.M.** While opening the quotation an authorized representative of the firm may be present.

- 11 The bid security (**EMD**) amount Rs. **5000/-** must be submitted along with the bid in form of Demand Draft/Banker's cheque drawn in favor of **ICAR UNIT- DWR, JABALPUR** otherwise the bid will not be taken into consideration.
- 12 This Directorate reserves the right to reject any or all the quotation(s) received without assigning any reason thereof.
- 13 All disputes subject to Jabalpur Jurisdiction only.
- 14 All communication must be addressed to the undersigned by **DESIGNATION ONLY** and not by name.
- 15 The Directorate will not be responsible for providing any compensation with respect to medical injuries from implement, tools, snake bite, any kind of accidents or death of labour workers while working in the Directorate premises. The contractor should make his own arrangement for providing medical, first aid, etc to his laborers.
- 16 Before giving or sending the Quotation the contractor may visit the site to better understand the clear requirement.
- 17 The contractor must have and attach the copy of all the required documents related to registration as well as TIN & PAN No. etc.
- 18 All the rates quoted should be on rft/sqft/cuft. Basis only. The quantum of work may vary. No extra payment will be given for any small work raised during ongoing work which is not mentioned in the estimate.
- 19 No Special arrangement/facilities will be provided to the Contractor; whatsoever will be available on the site may be permitted as per term and condition of quotation by C.A.
- 20 Before starting the work contractor should take necessary permission from the concerned Section. & the materials used may be approved by works committee before fixing.

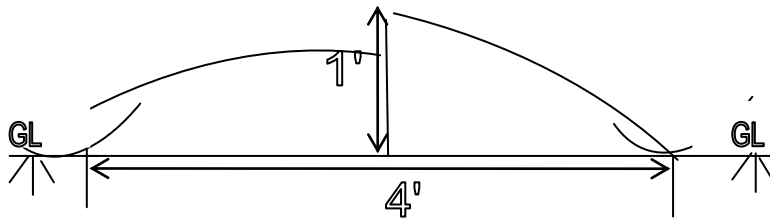

Yours faithfully

I/c Store & Purchase section